

# Infrared Short Pass Filters



- Cut-on wavelengths 2  $\mu\text{m}$  to 16  $\mu\text{m}$
- Transition slope  $\leq 6\%$
- High average transmittance
- Excellent blocking
- Standard & custom products
- Custom sizes from 1 mm to 200 mm
- Multiple substrate options

Short pass filters and long pass filters fall into the general category of edge filters. They are defined by a slope or edge defining spectral transmission as a function of wavelength. This slope establishes the transition between high transmission and high rejection or blocking. Newport's infrared short pass filters provide a defined spectral band of high average transmission on the short wavelength side of the cut-on edge. On the long wavelength side of the cut-on edge, the spectral energy is rejected or blocked using a combination of reflection and absorption. Infrared edge filters are typically specified by a cut-on wavelength where the absolute transmission is equal to 5%.

Infrared short pass filters can be manufactured using a variety of substrates that transmit infrared radiation. The most commonly used substrates are Germanium, Silicon, Aluminum Oxide or Sapphire, Zinc Sulphide, Zinc Selenide, fused silica, and glass. The choice of substrate may depend on several factors, but the key factor is typically the spectral range of interest. Newport's infrared short pass filters can be manufactured with cut-on wavelengths ranging from 2.0  $\mu\text{m}$  to 16  $\mu\text{m}$ . For the majority of applications, cut-on slopes of  $\leq 6\%$  are adequate but for special applications where a steeper slope is necessary, Newport can modify standard designs to meet these requirements.


Newport manufactures both OEM and catalog infrared short pass filters. Our catalog infrared short pass filters are offered in a standard 25.4 mm diameter size. Custom and OEM filters can be manufactured in a variety of shapes and sizes ranging from 1 mm to 200 mm.

## Custom & OEM Capability Specifications

Spectral Range	2.0 $\mu\text{m}$ - 16.0 $\mu\text{m}$
Cut-on/Cut-off Slope	3% - 6%
Transmittance	70% - 85% average
Blocking	$\leq 0.1\%$ typical; $\leq 0.01\%$ achievable
Surface Quality	F/F (80/50) per MIL-F-48616
Coating Adhesion	MIL-F-48616
Coating Hardness	MIL-F-48616
Humidity Resistance	MIL-F-48616
Operating Temperature Range	77 K ( $\approx -196^\circ\text{C}$ ) to $\approx 423$ K ( $+150^\circ\text{C}$ ) (typical)
Substrate Options	Ge, Si, $\text{Al}_2\text{O}_3$ , ZnS, ZnSe, Glass, Fused Silica
Size Range	1 mm - 200 mm

## Catalog Product Specifications

Size	25.4 mm diameter
Size Tolerance	+0.0 mm, -0.5 mm
Minimum Active Area	22.4 mm diameter
Thickness	0.5 mm – 2.0 mm
Specification Temperature	23 °C
Cut-on/Cut-off Slope	≤6%
Blocking	≤0.1% T from $1.12\lambda_c$ through far infrared (design goal)
Surface Quality	F/F (80/50) per MIL-F-48616
Humidity Resistance	MIL-F-48616
Cleaning	Non-abrasive method, acetone or isopropyl alcohol on lens tissue recommended
Operating Temperature Range	-50°C to +150°C (typical)

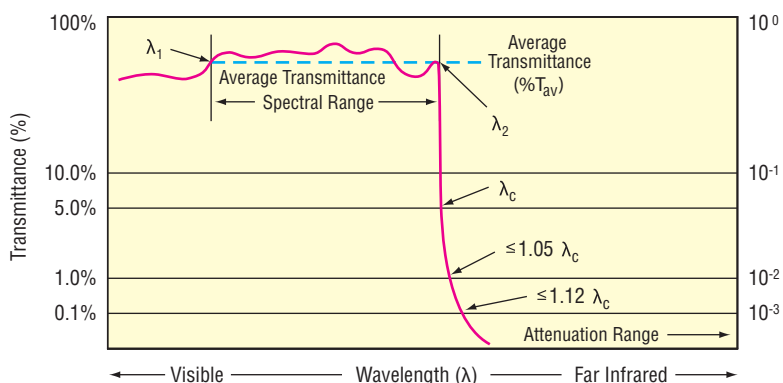

## Catalog Product Ordering Information

Cut-on/Cut-off Wavelength $\lambda_c$	Cut-on/Cut-off Wavelength Tolerance	Transmittance Band	Transmittance	Model
				25.4 mm diameter
2.0 $\mu\text{m}$	±0.04 $\mu\text{m}$	1.45 $\mu\text{m}$ - 1.85 $\mu\text{m}$	≥70% average	RS-2000-F
2.5 $\mu\text{m}$	±0.05 $\mu\text{m}$	1.60 $\mu\text{m}$ - 2.30 $\mu\text{m}$	≥70% average	RS-2500-F
3.0 $\mu\text{m}$	±0.06 $\mu\text{m}$	1.60 $\mu\text{m}$ - 2.70 $\mu\text{m}$	≥75% average	RS-3000-F
3.5 $\mu\text{m}$	±0.07 $\mu\text{m}$	1.75 $\mu\text{m}$ - 3.20 $\mu\text{m}$	≥80% average	RS-3500-F
4.0 $\mu\text{m}$	±0.08 $\mu\text{m}$	2.00 $\mu\text{m}$ - 3.70 $\mu\text{m}$	≥80% average	RS-4000-F
4.5 $\mu\text{m}$	±0.09 $\mu\text{m}$	2.25 $\mu\text{m}$ - 4.10 $\mu\text{m}$	≥80% average	RS-4500-F

Optical Filters & Coatings Technical Sales: 1-508-528-4411 [filters.sales@newport.com](mailto:filters.sales@newport.com)



Newport Corporation, Global Headquarters  
1791 Deere Avenue, Irvine, CA 92606, USA

[www.newport.com](http://www.newport.com)

PHONE: 1-800-222-6440 1-949-863-3144 FAX: 1-949-253-1680 EMAIL: [sales@newport.com](mailto:sales@newport.com)  
Complete listings for all global office locations are available online at [www.newport.com/contact](http://www.newport.com/contact)

	PHONE	EMAIL	PHONE	EMAIL
Belgium	+32-(0)0800-11 257	<a href="mailto:belgium@newport.com">belgium@newport.com</a>	Mtn. View, USA	+1-800-775-5273
China	+86-10-6267-0065	<a href="mailto:china@newport.com">china@newport.com</a>	Netherlands	+31-(0)30 6592111
France	+33-(0)1-60-91-68-68	<a href="mailto:france@newport.com">france@newport.com</a>	United Kingdom	+44-1235-432-710
Italy	+39-02-92-90-921	<a href="mailto:newport@tin.it">newport@tin.it</a>	Germany / Austria / Switzerland	+49-(0)6151-708-0
Japan	+81-3-3794-5511	<a href="mailto:spectra-physics@splasers.co.jp">spectra-physics@splasers.co.jp</a>		
Taiwan	+886 -(0)2-2508-4977	<a href="mailto:china@newport.com.tw">china@newport.com.tw</a>		



Newport Corporation, Irvine, California; Mountain View, California; Tucson, Arizona; Evry and Beaune-La-Rolande, France have all been certified compliant with ISO 9001 by the British Standards Institution or TUV.

© 2008 Newport Corporation. All rights reserved. Spectra-Physics, the Spectra-Physics logo, and the Newport logo are registered trademarks of Newport Corporation. All other trademarks and servicemarks are the property of their respective owners.

DS-03081 (04/08)